NON-CONTROLLED COPY

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE

VERIFY REV LEVEL OF PAPER COPY WITH REV LEVEL ON PPC WEB SITE

	PIPE SIZE	FACE OF FLANGE DIMENSION	OUTSIDE DIAMETER	BOLT CIRCLE	NO. OF BOLTS	NO. OF GUSSETS	THICKNESS OF GUSSETS
	1"	6"	4 1/4"	3 1/8"	4	4	1/4"
	1 1/2"	6 1/2"	5"	3 7/8"	4	4	1/4"
	2"	6 1/2"	6"	4 3/4"	4	4	1/4"
	3"	6 1/2"	7 1/2"	6"	4	4	1/2"
	4"	6 1/2"	9"	7 1/2"	8	4	1/2"
	6"	6 1/2"	11"	9 1/2"	8	4	1/2"
B *	8"	10"	13 1/2"	11 3/4"	12	4	1/2"
A *	10"	10"	16"	14 1/4"	12	4	1/2"
*	12"	10"	19"	17"	12	4	1/2"

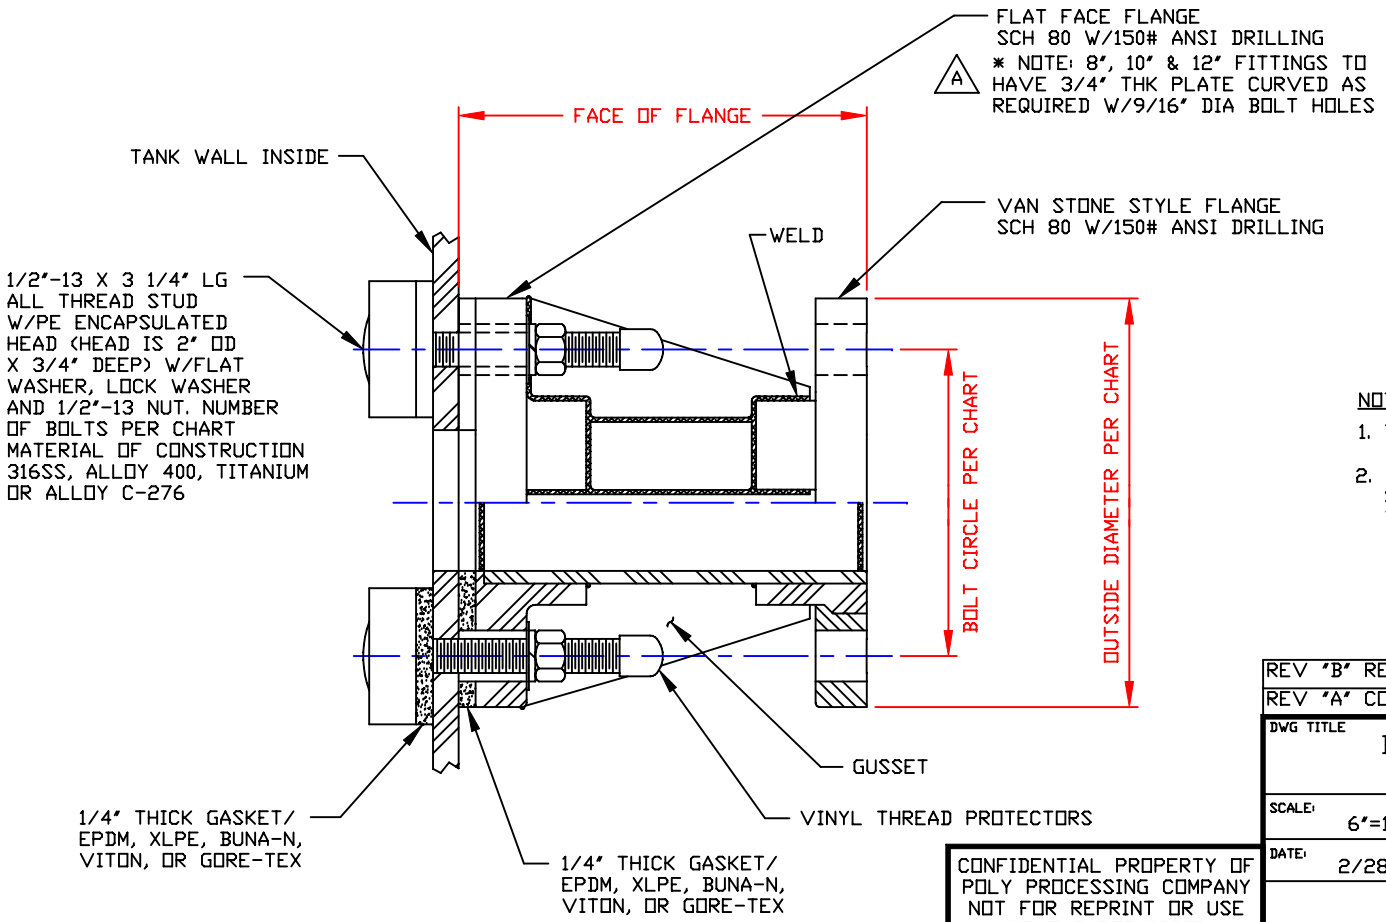

NOTES

1. THIS IS A COMPUTER GENERATED DRAWING. DO NOT REVISE BY HAND.
2. BOLTED SPOOL FITTINGS MAY BE USED ON THE TANK SIDE WALL, ON THE BOTTOM, OR ON THE CENTER OF THE DOME. BOLTED SPOOL FITTINGS MAY ALSO BE USED ELSEWHERE ON THE DOME IF IT IS NOT NESSARY THAT THE FITTING WILL FOLLOW THE CURVE OF THE DOME.

REV "B" REVISED # OF BOLTS BY:BT 2/21/06 CK:MBW

REV "A" CORRECTED 8", 10", & 12" FITTINGS BY:MBW 5/2/05 CK:JB

DWG TITLE: BOLTED SPOOL FITTING WITH GUSSETS (PVC OR CPVC)

SCALE: 6"=12"

DATE: 2/28/01

POLYPROCESSING COMPANY

Central Region
P.O. Box 4150 (71211)
2501 Old Covington Rd.
Monroe, LA 71203
(318) 343-7565
FAX (318) 343-8795

DR: J. BRANTLEY

CK: MB WILKERSON

SHEET: 1 OF 1

COMPUTER FILE: BLTDSP3

REV: B

CONFIDENTIAL PROPERTY OF POLY PROCESSING COMPANY NOT FOR REPRINT OR USE WITHOUT PERMISSION