

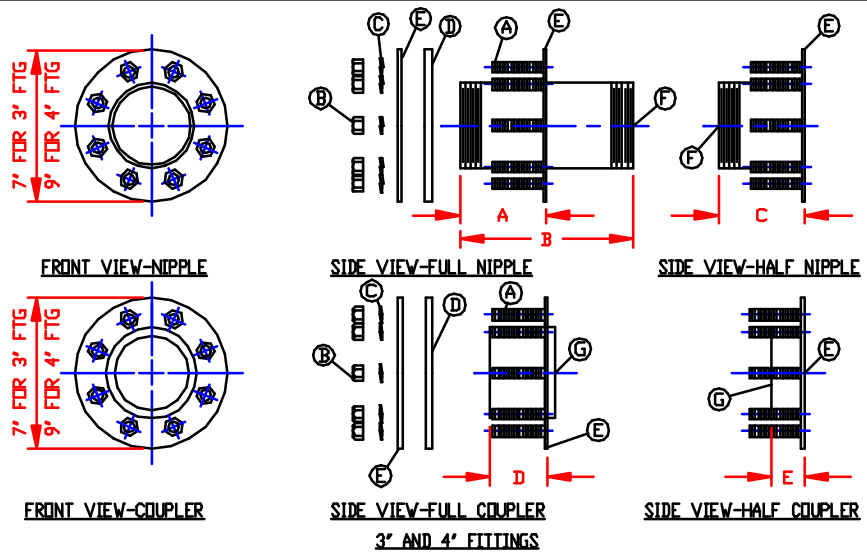
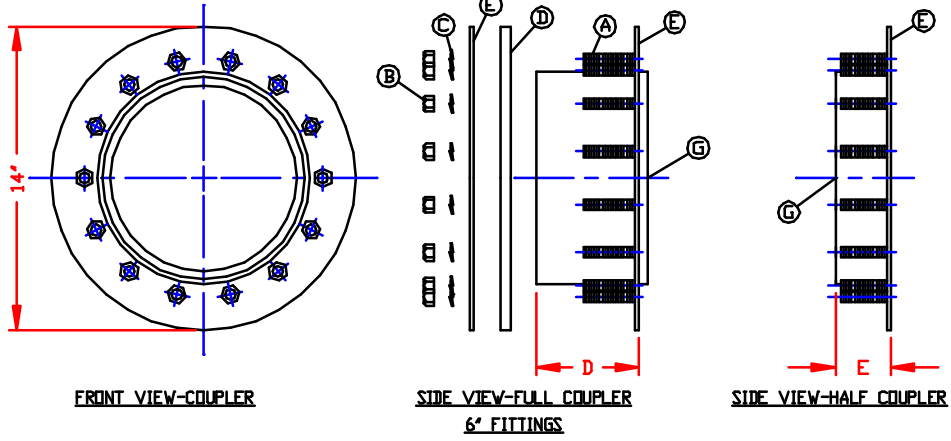


NON-CONTROLLED COPY
 INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE
 COPY WILL NOT BE UPDATED

COPY ISSUED BY.....
 COPY ISSUED ON.....

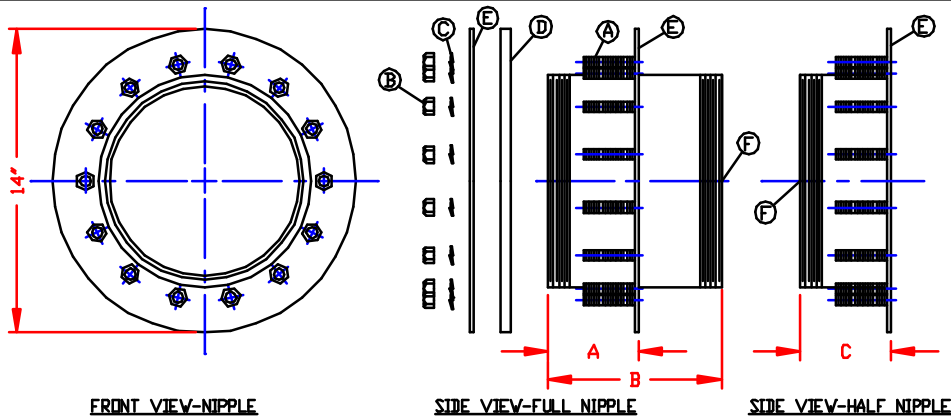

- (A) 1/2-13 X 2 1/2 ALL THREAD STUD
- (B) 5/16-18 OR 1/2-13 HEX NUT
- (C) 5/16" OR 1/2" LOCK WASHER
- (D) GASKET MATERIAL AND THICKNESS PER PD
- (E) FRONT AND BACK PLATES TO BE 1/8" THK FOR 3" FTGS, 3/16" THK FOR 4" & 6" FTGS
- (F) SCH 40 PIPE
- (G) STANDARD HALF OR FULL COUPLER

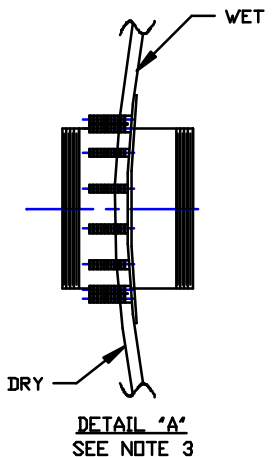

NOTES:
 1. THIS IS A COMPUTER GENERATED DRAWING. DO NOT REVISE BY HAND.
 2. MATERIAL MAY BE 316SS OR 316LSS. PIECE PARTS BASED ON AVAILABILITY AT THE TIME OF MANUFACTURE. IF ALL 316LSS IS REQUIRED, IT MUST BE SPECIFIED AT TIME OF ORDER. ON 316LSS FITTINGS, LOCK WASHER WILL BE 316SS W/TEFLON COATING.
 3. FRONT AND BACK PLATES TO BE ROLLED TO OD OF TANK IF REQ'D PER PD. (SEE DETAIL "A")

SIZE OF FITTING	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"	BOLT CIRCLE
3"	4"	8"	4"	2 5/8"	1 1/2"	5 3/8"
4"	4"	8"	4"	3"	1 11/16"	6 3/8"
6"	4"	8"	4"	3"	1 15/16"	8 13/16"

DWG TITLE
3" THRU 6" STAINLESS STEEL BULKHEAD FITTING

SCALE: 2"=1'-0"

DATE: 2/20/01

POLY PROCESSING
 COMPANY

Control Number
 PLS. SEE QRS. CHECK
 888 THE STEVENSON RD.
 28575-2172
 FAX: 910-669-0750

DR: MB WILKERSON
 CK: J. BRANTLEY

SHEET 1 OF 1
 COMPUTER FILE SSBHF2
 REV -